




CENTELLEN HD 3822 – special material with great stress relaxation and tightness. It is an improvement of the proven CENTELLEN WS 3820.

CENTELLEN HD 3822 is a calendered material. It is specifically designed for applications where the CENTELLEN WS 3820 is mechanically overstressed. Due to high similarities, the chemical resistance of the CENTELLEN WS 3820 can also be used for CENTELLEN HD 3822.

CENTELLEN HD 3822 consists of aramid and inorganic fibers as well as mineral fillers for reinforcement bonded with NBR rubber.

This raw material combination results in the following material profile: great stress relaxation and high tightness combined with high resistance against oils. Due to this material properties, the material can be used for demanding applications with high internal pressure combined with medium temperature range.

Typical applications include piping in the chemical industry, general industry, sanitary industry as well

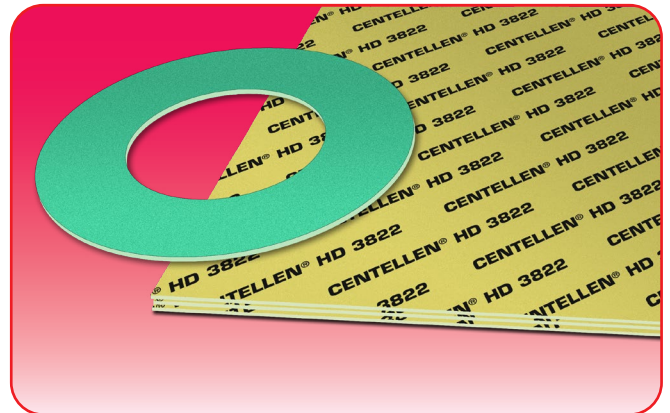

as the beverage industry. The material is suitable for hydrocarbons like oils or solvents, alcohols, glycols, aqueous solutions as well as water and steam. Weak alkalines and organic acids are also among possible applications.

Manufactured by KLINGER

Basis composition Aramid fibers bonded with NBR.

Color Light green / Yellow

Certificates Oxygen-tested, DIN-DVGW, DIN 16421 (W 270), DIN 30653 (VP 401), TA-Luft (Clean air), WRAS, KTW-BWGL

Sheet size 1000 x 1500 mm, 2000 x 1500 mm

Thickness 0.5 mm, 1.0 mm, 1.5 mm, 2.0 mm, 3.0 mm
Other thicknesses on request


Tolerances Thickness according to DIN 28091-1
Length: ± 50 mm
Width ± 50 mm

Industry General Industry / Chemical / Oil & Gas / Energy / Infrastructure / Pulp & Paper

TECHNICAL DATA - Typical values for a thickness of 2.0 mm

| | | | |
|--|-----------------------------|-------------------|-------|
| Density | | g/cm ³ | 1.75 |
| Compressibility | ASTM F 36 J | % | 9 |
| Recovery | ASTM F 36 J | % | 55 |
| Stress relaxation DIN 52913 | 50 MPa, 16 h/175°C | MPa | 35 |
| | 50 MPa, 16 h/300°C | MPa | 25 |
| KLINGER cold/hot compression 50 MPa | thickness decrease at 23°C | % | 12 |
| | thickness decrease at 300°C | % | 20 |
| Tightness | DIN 28090-2 | mg/(s x m) | 0.04 |
| Thickness increase after fluid immeris ASTM F 146 | oil IRM 903: 5 h/150°C | % | 5 |
| | fuel B: 5 h/23°C | % | 8 |
| Cold creep | DIN 28090-2 | % | 5 |
| Cold recovery | DIN 28090-2 | % | 2 |
| Hot creep during service | DIN 28090-2 | % | 17 |
| Hot recovery | DIN 28090-2 | % | 3 |
| Max. surface pressure EN 13555 | 23°C | N/mm ² | > 200 |
| | 200°C | N/mm ² | > 200 |
| | 250°C | N/mm ² | > 200 |


P-T diagram

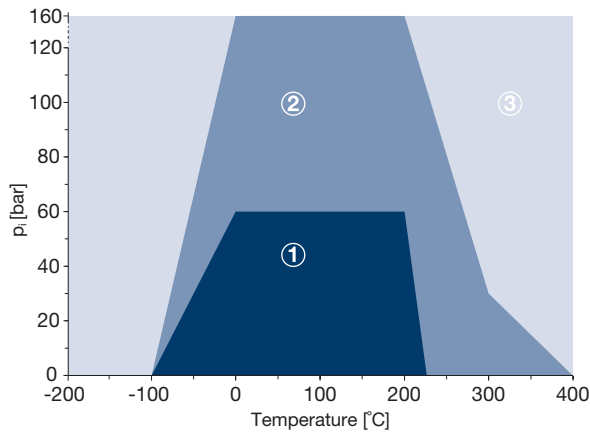

The area of the P-T diagram

- ① In area one, the gasket material is normally suitable subject to chemical compatibility.
 - ② In area two, the gasket material may be suitable but a technical evaluation is recommended.
 - ③ In area three, do not install the gasket without a technical evaluation.
- Always refer to the chemical resistance of the gasket to the media.


Maximum surface pressure

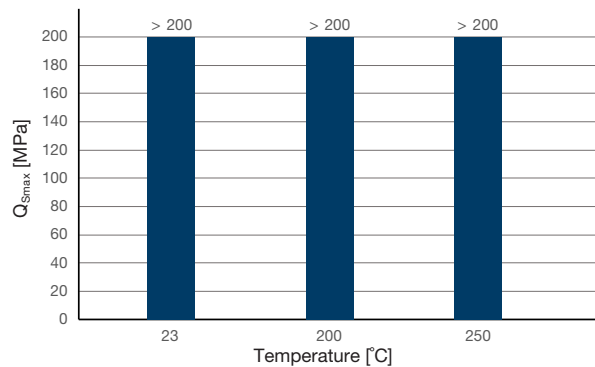

Maximum permissible surface pressure in operating conditions Q_{Smax} acc. to EN 13555

The maximum surface pressure in operating condition is the maximum permissible surface pressure the gasket can be loaded at the specified temperatures, without crucial plastic deformation and/or destruction of the gasket.

Tightness performance

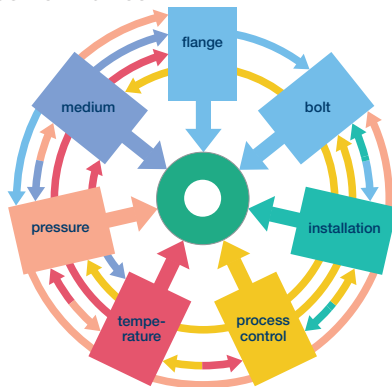

The many and varied demands on gaskets

The functionality and tightness of flange connections depends on a large number of parameters. Maximum temperature and pressure values alone can not define a material's suitability for an application. These limits are dependent upon a multiplicity of factors as shown in the picture on the left. A statement about the expected tightness of the flange connection is only possible if a qualified and defined installation of the gasket has been executed.

Chemical resistance chart

Simplified overview of the chemical resistance depending on the most important groups of raw materials:

| CENTELLEN® HD 3822 | | | | | | A: small or no attack | | B: weak till moderate attack | | C: strong attack | |
|------------------------|------------|----------|--------------------------------|-----------|--------------------|-----------------------|--------|------------------------------|-------|------------------|----------------|
| Paraffinic hydrocarbon | Motor fuel | Aromates | Chlorinated hydrocarbon fluids | Motor oil | Mineral lubricants | Alcohol | Ketone | Ester | Water | Acid (diluted) | Base (diluted) |
| A | B | C | C | A | B | A | C | C | A | A | A |

All information is based on years of experience in production and operation of sealing elements. However, in view of the wide variety of possible installation and operating conditions one cannot draw final conclusions in all application cases regarding the behaviour in gasket joint. The data may not, therefore, be used to support any warranty claims. This edition cancels all previous issues. Subject to change without notice.

